

SE4-30 STANDARD SERIES

SAFETY CATEGORY 4 / HAND PROTECTION




SE4-30 Standard Series

HAND PROTECTION


30mm / 1.18 in. Resolution

- * Economical Category 4 Safety Light Curtains
- * Simple side rail mounting system for easy set-up
- * Simple wiring to a safety relay

SELECTION & ORDERING INFORMATION TABLE

SE4-30 Series - EDM (External Device Monitoring)						
4-POLE M12 CONNECTOR	Model	Beams	Protective Height	Response Time	8-POLE M12 CONNECTOR	
	 <ul style="list-style-type: none"> 1 = Brown = +24 VDC 2 = White = N.C. 3 = Blue = 0 V 4 = Black = N.C. 	SE4-30-015-PP-E	8	180mm (7.09 in.)		
Emitter	SE4-30-030-PP-E	16	327mm (12.87 in.)	20ms		
	SE4-30-045-PP-E	24	474mm (18.66 in.)	23ms		
	SE4-30-060-PP-E	32	621mm (24.45 in.)	25ms		
	SE4-30-075-PP-E	40	768mm (30.24 in.)	27ms		
	SE4-30-090-PP-E	48	915mm (36.02 in.)	30ms		
	SE4-30-105-PP-E	56	1062mm (41.81 in.)	32ms		
	SE4-30-120-PP-E	64	1209mm (47.60 in.)	35ms		
	SE4-30-135-PP-E	72	1356mm (53.39 in.)	38ms		
	SE4-30-150-PP-E	80	1503mm (59.17 in.)	40ms		
	SE4-30-165-PP-E	88	1650mm (64.96 in.)	43ms	Receiver	

DIMENSIONS

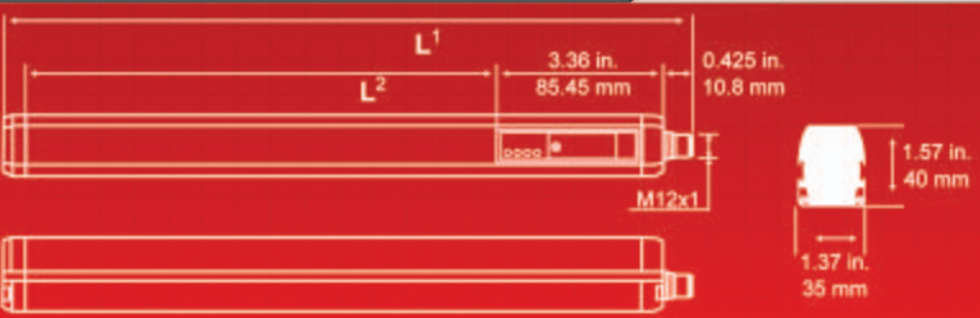

Part #	L ¹	L ²
SE4-30-015-PP-E	256	147
SE4-30-030-PP-E	403	294
SE4-30-045-PP-E	550	441
SE4-30-060-PP-E	697	588
SE4-30-075-PP-E	844	735
SE4-30-090-PP-E	991	882
SE4-30-105-PP-E	1138	1029
SE4-30-120-PP-E	1285	1176
SE4-30-135-PP-E	1432	1323
SE4-30-150-PP-E	1579	1470
SE4-30-165-PP-E	1726	1617

