

SF2 SERIES

SAFETY CATEGORY 2 / HAND PROTECTION



SF2 Standard Series



HAND PROTECTION

30mm / 1.18 in. Resolution

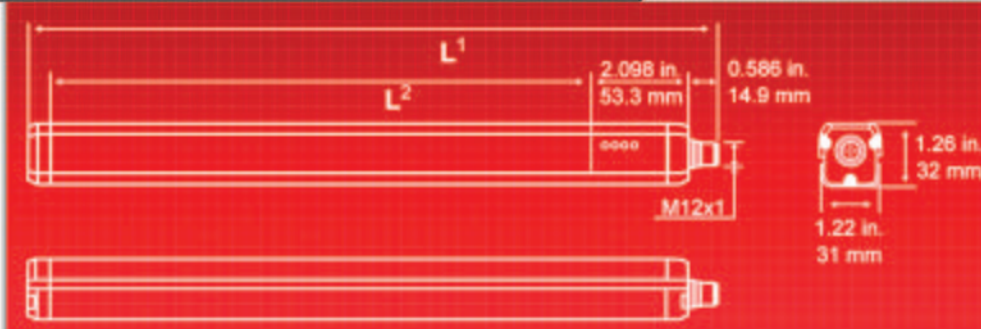
Inexpensive Safety Curtain for low risk situations, with reversible dangers. Please follow safety guidelines.

- * **Operating Distance up to 15m (49 feet)**
- * **31mm X 32mm (1.22" X 1.25") Compact Profile**
- * **Auto Reset**
- * **Optical Synchronizing**

SELECTION & ORDERING INFORMATION TABLE

	Model	Beams	Protective Height	Response Time (ms)	
 <p>1 = brown = +24 VDC 2 = white = OSSD1 3 = blue = 0 V 4 = black = OSSD2 5 = grey = TEST *</p> <p>Use R-FS5TZ-V075/G Unshielded Cable</p>	SF2-30-015-PP-X	8	147mm (5.78 in.)	14	 <p>1 = brown = +24 VDC 3 = blue = 0 V</p> <p>Use R-FS4TZ-V075 Unshielded Cable</p>
	SF2-30-030-PP-X	16	294mm (11.57 in.)	15	
	SF2-30-045-PP-X	24	441mm (17.36 in.)	16	
	SF2-30-060-PP-X	32	588mm (23.15 in.)	17	
	SF2-30-075-PP-X	40	735mm (28.93 in.)	18	
	SF2-30-090-PP-X	48	882mm (34.72 in.)	19	
	SF2-30-105-PP-X	56	1029mm (40.51 in.)	20	
	SF2-30-120-PP-X	64	1176mm (46.30 in.)	22	
	SF2-30-135-PP-X	72	1323mm (52.09 in.)	23	
	Receiver	SF2-30-150-PP-X	80	1470mm (57.87 in.)	

DIMENSIONS



Part #	L ¹	L ²
SF2-30-015	227	147
SF2-30-030	374	294
SF2-30-045	521	441
SF2-30-060	668	588
SF2-30-075	815	735
SF2-30-090	962	882
SF2-30-105	1109	1029
SF2-30-120	1256	1176
SF2-30-135	1403	1323
SF2-30-150	1550	1470

