

LIGHT CURTAIN ACCESSORIES

MIRRORS & STANDS



The deviating mirrors of the SE-DM series protect different sides of a machine and are available in several heights ranging from 150 mm to 1800 mm. The column and floor stands for safety light curtains and deviating mirrors are available with heights ranging from 800 mm to 1800 mm. The protective stands of the SE-P series, ideal to guarantee device protection against shocks, is also available in different heights ranging from 273 mm to 1743 mm. The SE-LP Series laser pointer makes alignment and installation of light curtains quick and easy, particularly for applications with long operating distances and / or when using deviating mirrors.



MIRROR DIMENSIONS & ORDERING INFORMATION

Part #	L1 (mm)	L2 (mm)
SE-DM 500	554	384
SE-DM 600	704	534
SE-DM 800	904	734
SE-DM 900	1004	834
SE-DM 1200	1264	1094
SE-DM 1500	1604	1434
SE-DM 1650	1804	1634

STAND DIMENSIONS & ORDERING INFORMATION

Part #	L1 (mm)
SE-S 800	800
SE-S 1000	1000
SE-S 1200	1200
SE-S 1500	1500
SE-S 1800	1800



SE-LP SERIES LIGHT CURTAIN ALIGNMENT LASER POINTER

The laser pointer SE-LP is an attachment for the easy alignment and installation of the SE safety light curtain series. The pointer can be moved along the light curtain profile to verify the complete device alignment.



SHIELDED CABLES

The shielded cables of the CV series are made of oil resistant PUR, and are available with a straight or 90° connection.

CABLE CONNECTIONS

Straight Models		Right-Angle Models	
CV-A1-20-B-03 (3 meter cable)	CV-A1-20-B-10 (10 meter cable)	CV-A1-20-B-03-R (3 meter cable)	CV-A1-20-B-10-R (10 meter cable)
8-pin straight	4-pin straight	8-pin right-angle	4-pin right-angle
5-pin to 5-pin Double-ended Cable for Slave Connection			
CV-A1-23-B-005 (0.5 meter cable)	CV-A1-23-B-01 (1 meter cable)	CV-A1-23-B-005-R (0.5 meter cable)	CV-A1-23-B-01-R (1 meter cable)
5-pin straight	5-pin straight	5-pin right-angle	5-pin right-angle
Other lengths and configurations are available, please contact customer service.			




MOUNTING BRACKETS

The ST-KSTD model represents the spare part kit composed of 4 standard fixing brackets for SE safety light curtains.


The ST-K*OR supports allow the orientation of the SE safety light curtains of $\pm 5^\circ$.

The ST-K*AV supports allow the absorption of the vibrations caused by the machinery where the SE and SF2 safety light curtains are installed.

The ST-KSF2 model represents the anti-scratch brackets (kit composed of 4 brackets) for SF2 safety light curtains.




ST-KSTD series: standard fixing bracket.

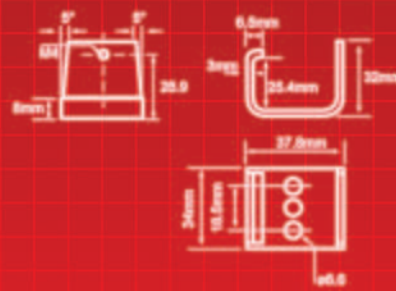


SF2 series: standard fixing bracket.




SE series: application with standard fixing bracket.



*SE series: application with standard fixing bracket and ST-K*AV anti-vibration support.*



*SE series: application with standard fixing bracket and ST-K*OR orientable support.*



*SE series: application with standard fixing bracket, ST-K*AV anti-vibration support and ST-K*OR orientable support.*



*SF2 series: application with standard fixing bracket. The standard fixing bracket is compatible with the SE standard bracket, ST-K*AV anti-vibration support and ST-K*OR orientable support.*



SF2 series: application with ST-KSF2 anti-scratch bracket.